


reason

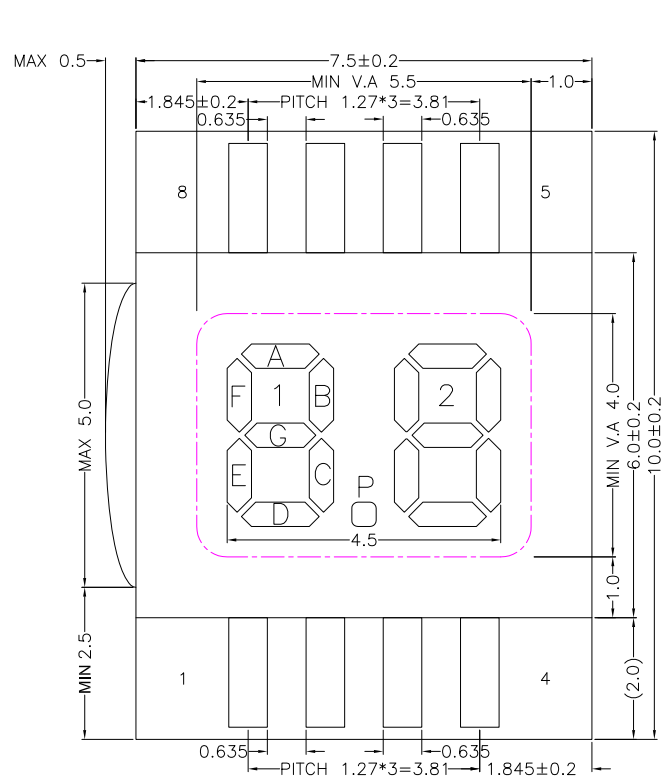

VIEWING DIRECTION

PIN	1	2	3	4	5	6	7	8
COM1	1F	1A	2F	2A				COM1
COM2	1G	1B	2G	2B			COM2	
COM3	1E	1C	2E	2C		COM3		
COM4		1D	P	2D	COM4			

大连佳显电子有限公司
Dalian Good Display CO., LTD

DESIGNED BY:


DJH

GDC02693

VERSION: 1.0


NO. 1 OF 3

CHECKED BY:



UNIT: mm



DATE: 2014-03-11

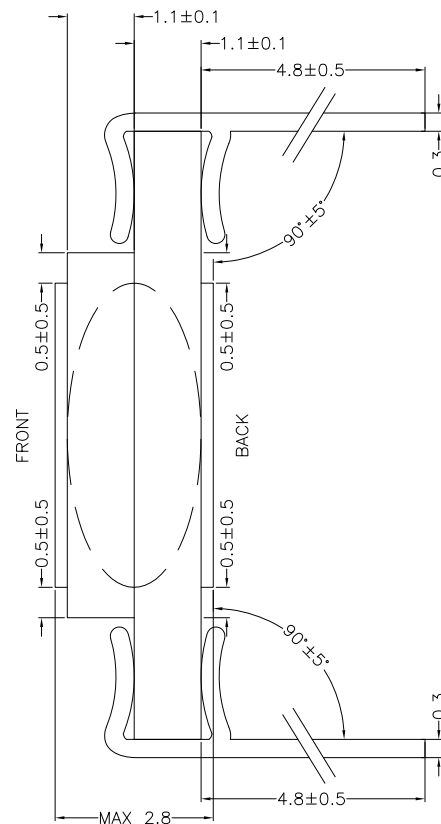

全显示效果图

NOTES:

- DISPLAY TYPE: TN
- LCD OPERATING VOLTAGE: 3.0V
- OPERATING TEMPERATURE: -20°C~70°C
- STORAGE TEMPERATURE: -30°C~80°C
- DRIVE MODE: 1/4D, 1/2B
- VIEWING DIRECTION: 6:00
- POLARIZER TYPE: REFLECTIVE, POSITIVE
- CONNECTOR: PIN
- CUSTOMER NO: ---
- Unspecified tolerance is ±0.2mm
- LCM NO: ---

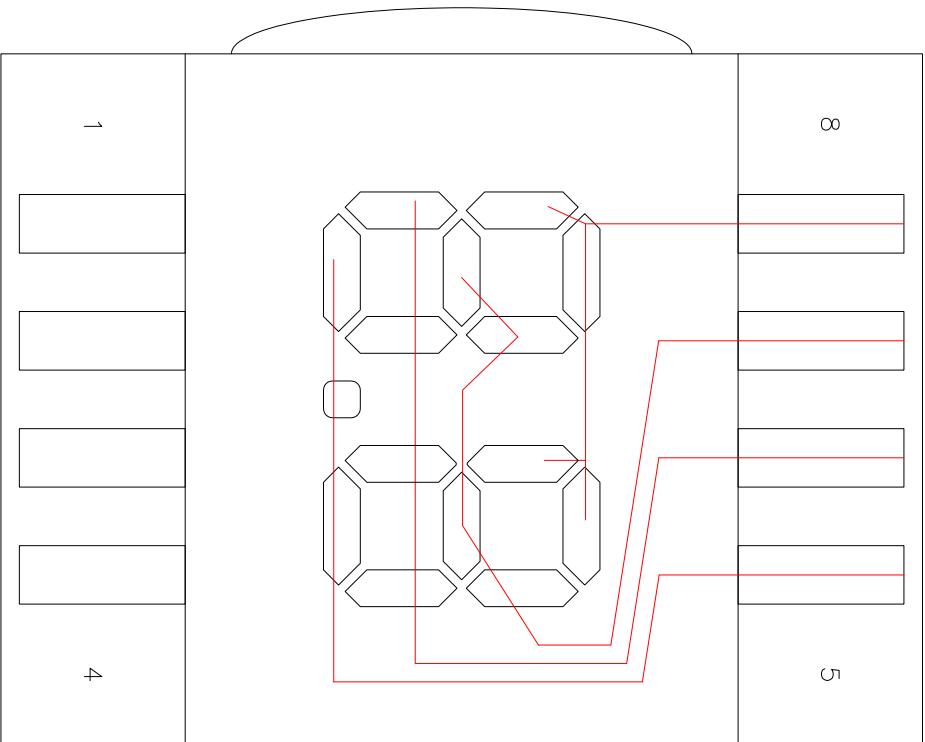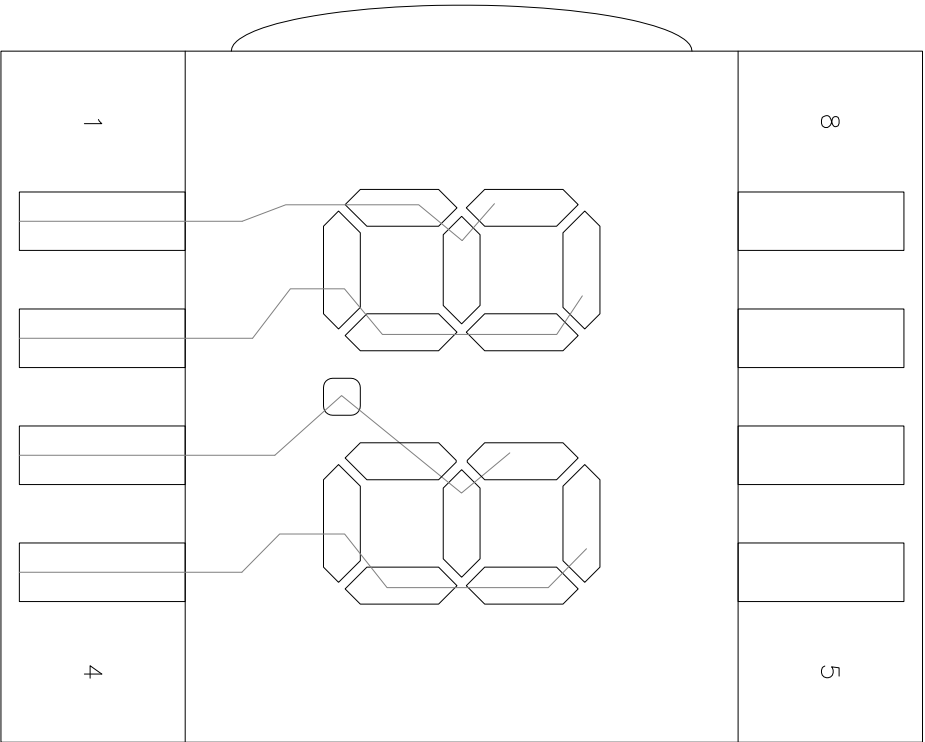

大连佳显电子有限公司 Dalian Good Display Co., LTD			
DESIGNED BY: DJH	GDC02693	VERSION: 1.0	
		NO. 2	OF 3
CHECKED BY:	 	UNIT: mm	
		DATE: 2014-03-11	