
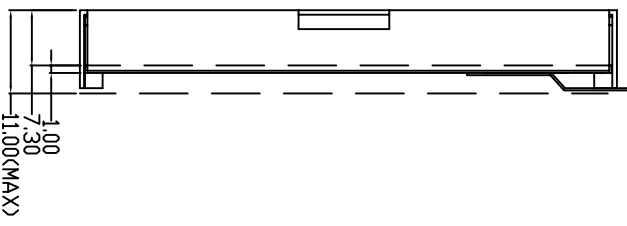


STIFFENER
CONDUCTIVE SIDE

6.00±1.00

确认后请签字并回传:

CN1



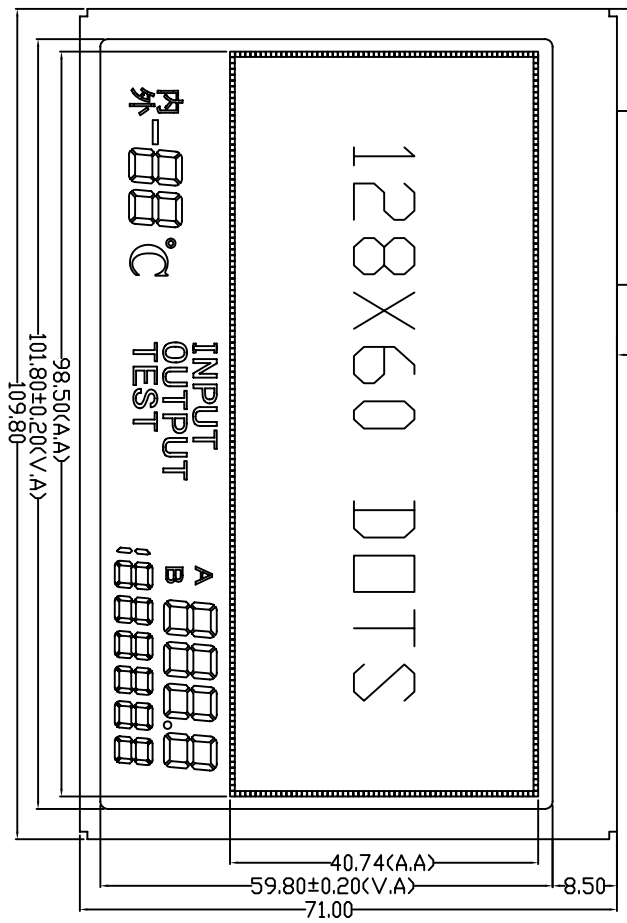


1	NC	12	DB3
2	/CS1	13	DB4
3	VSS	14	DB5
4	VDD	15	DB6
5	V0	16	DB7
6	RS	17	/REST
7	R/W	18	NC
8	E	19	A1
9	DB0	20	K1
10	DB1	21	A2
11	DB2	22	K2

NOTES:

- 1.DISPLAY TYPE: FSTN
- 2.VIEWING DIRECTION: 12:00
- 3.POLARIZER MODE: TRANSELECTIVE/POSITIVE
- 4.OPERATING TEMP: -20°C--+70°C
- 5.STORAGE TEMP: -30°C---+80°C
- 6.VDD: +5.0V
- 7.DRIVE METHOD: 1/64DUTY 1/9BIAS
- 8.CONTRROLLER: SED1565DOB
- 9.BACKLIGHT TYPE:LED(KAMBERJ11.4V±0.1V)
- 10.ALL UNMARKED TOLERANCES: ±0.30mm

B 7294
1053441



大连佳显电子有限公司



绘图:	绘图编号: JMSC-G12864MUGLSDC-8	单位: mm
审核:	客户编号: JMSC-G12864MUGLSD	日期:
批准:	图纸版本号: 0-8	页数: