



1. DISPLAY TYPE	TN, POSITIVE	7. DRIVE METHOD	1/4 DUTY 1/3 BIAS	REVISION RECORD	REV	A		
2. VIEWING DIRECTION	12 O'CLOCK	8. OPERATING TEMP	-20°C ~ 70°C			DRAWING NO. GD46532-1		
3. OPERATING VOLTAGE	30 V	9. STORAGE TEMP	-30°C ~ 80°C			APPROVED BY	CHECKED BY	UNIT mm
4. POLARIZER MODE:	TRANSPARENT	10. CONNECTOR	PIN			DRAWING BY	ZENGQI	PRD (3)
5. DRIVER IC		11. GLASS SIZE	37*25.6/37*20.6					PAGE
6. PRINTING	WITH SCREEN PRINTING	12. ROHS	符合“ROHS”要求					1/4

大连佳显电子有限公司



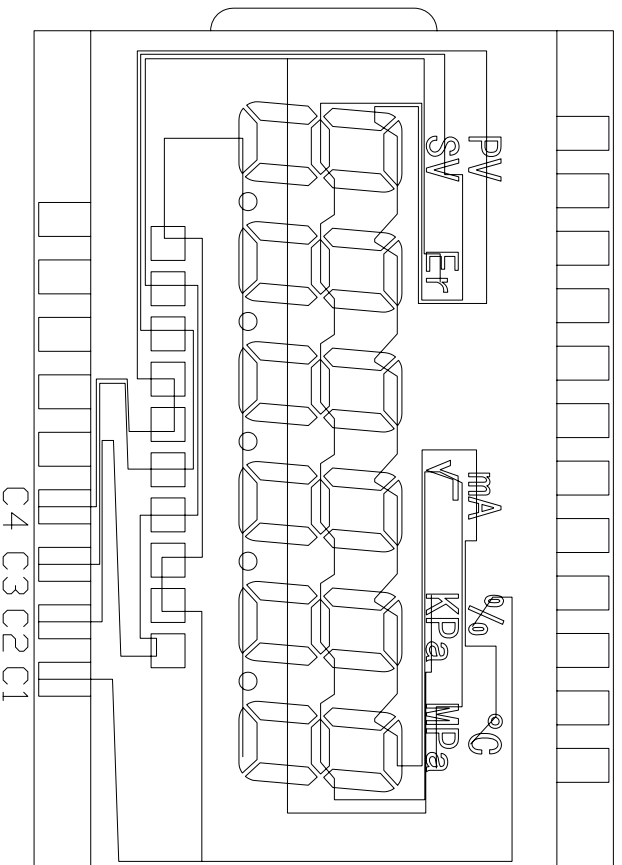

COM

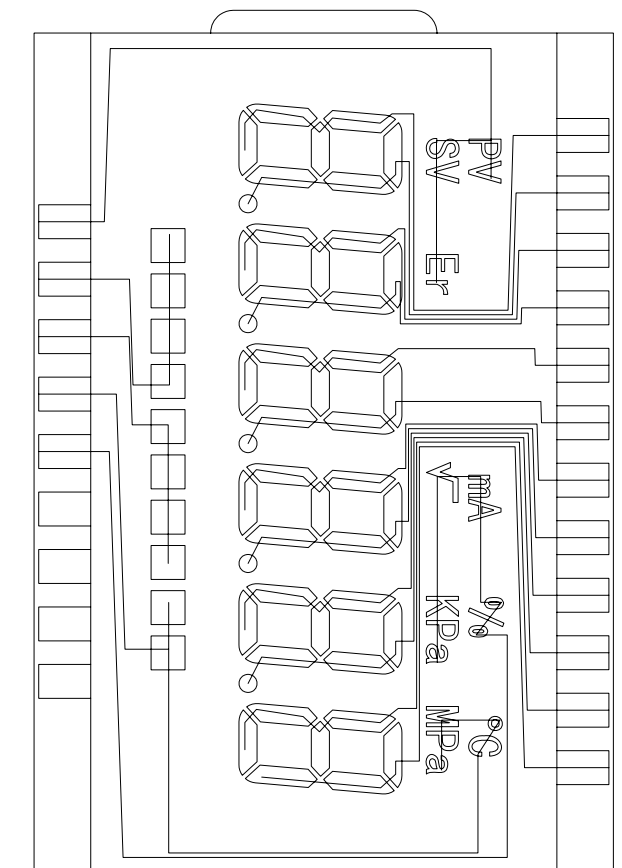


SEG

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
COM1	1D	H1	2D	H2	3D	H3	4D	H4	5D	H5	6D			Z1	Z8	Z9	%				COM1
COM2	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C	Er	Z2	Z7	Z10	KPa			COM2	
COM3	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B	SV	Z3	Z6	MPa	Z11		COM3		
COM4	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	PV	Z4	Z5	°C	mA	COM4			



注：此图面仅供走线参考

REVISION RECORD		REV	大连佳显电子有限公司																	
1		A																		
2			DRAWING NO.	GD46532-1	UNIT	mm	PRO	(3)												
3			APPROVED BY	CHECKED BY	DRAWING BY	ZENGQT														
4						2008/08/05														
5																				
			PAGE															2/4		

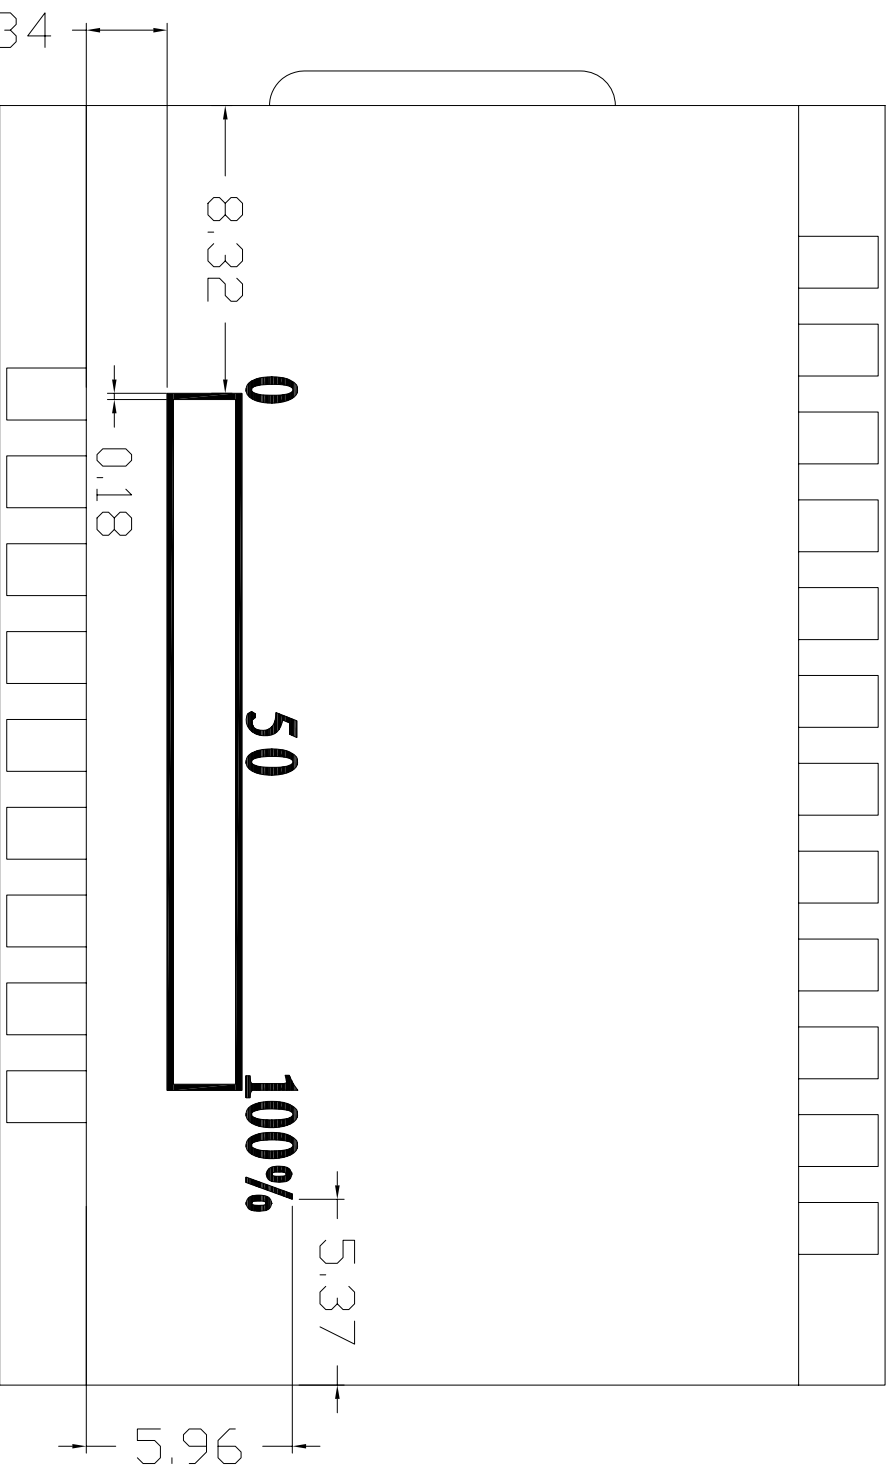

黑色丝印印在底玻璃

REVISION RECORD		REV	大连佳显电子有限公司			
1		A	DRAWING NO.	GD46532-1	UNIT	mm
2			APPROVED BY	CHECKED BY	DRAWING BY	PRD (3)
3					ZENGQI	3/4
4					2008/08/05	
5						

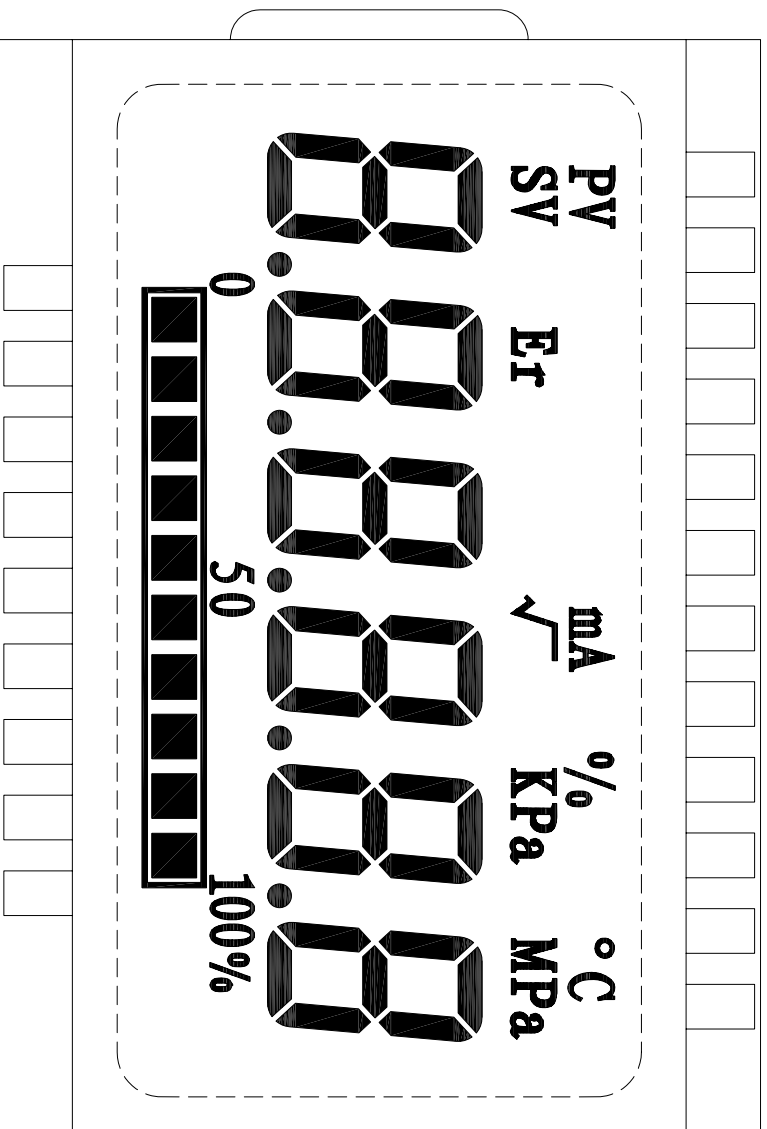

4:1 显示效果图

1:1 显示效果图

REVISION RECORD		REV		A		大连佳显电子有限公司	
1		DRAWING NO.	GD46532-1	UNIT	mm	PRO	(3)
2		APPROVED BY		CHECKED BY		DRAWING BY	ZENGQI
3							
4							
5							