
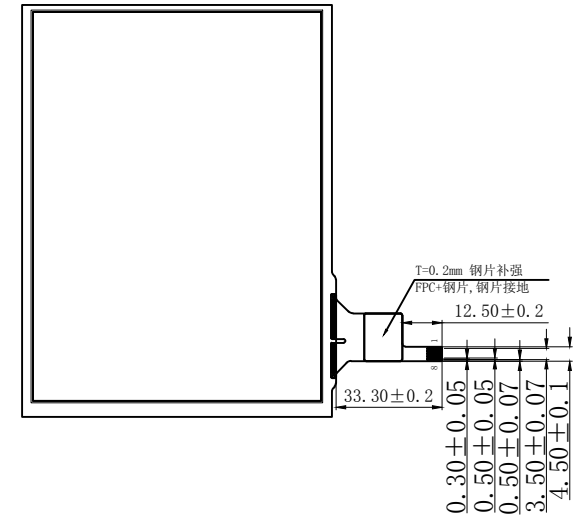
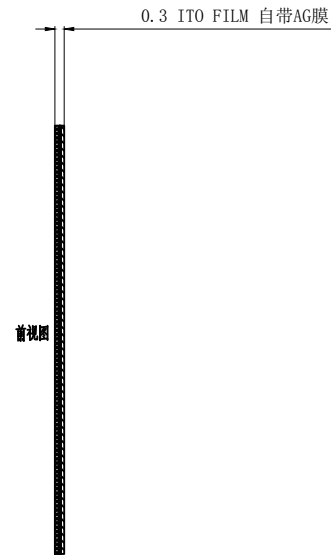


VER	Modification	Recorder	Date
V1.0	New Version		2017-04-25
V1.1	FPC's configuration is reduced.		2017-05-09

FRONT VIEW 1:1

SIDE VIEW landscape10:1

BACK VIEW 1:1

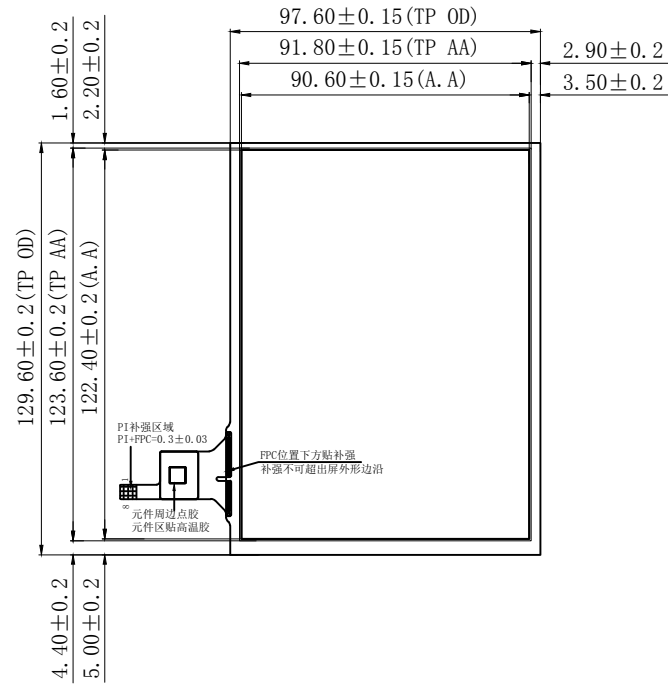

## Technical Parameters:

1. Full Fitting Process
2. Number of Channels: 16\*22 Control IC: FT5436
3. Working Voltage: 2.8V-3.6 V
4. Luminousness:  $\geq 83\%$
5. Surface Hardness:  $\geq 2H$
6. Operating Environment:  $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$ ,  $\leq 90\%RH$
7. Storage Environment:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ,  $40\%RH \sim 70\%RH$
8. Unlabeled Tolerance:  $\pm 0.2\text{mm}$

TP Pin define	
1	GND
2	VDD
3	RST
4	INT
5	SDA
6	SCL
7	NC
8	NC

DALIAN GOOD DISPLAY CO., LTD

DRAWN BY:	PRODUCT MODEL: Capacitive Touch Panel Drawing for GDE060BA	VIEW:
CHECKED BY:	CUSTOMER ID:	
APPROVED BY:	DATE: 2017-07-21	UNITS: mm
Standard tolerance:	WEBSITE: www.good-display.com	SCALE: 1:1