



Customer:	Customer NO.:	Customer Approve By:	REV:	DESCRIPTION OF MODIFY	MODIFY BY	DATE
			A0	1 <sup>ST</sup> .DESIGN		30-May-2018
			A1			
			A2			

### Capacitive Touch USB Driving Board

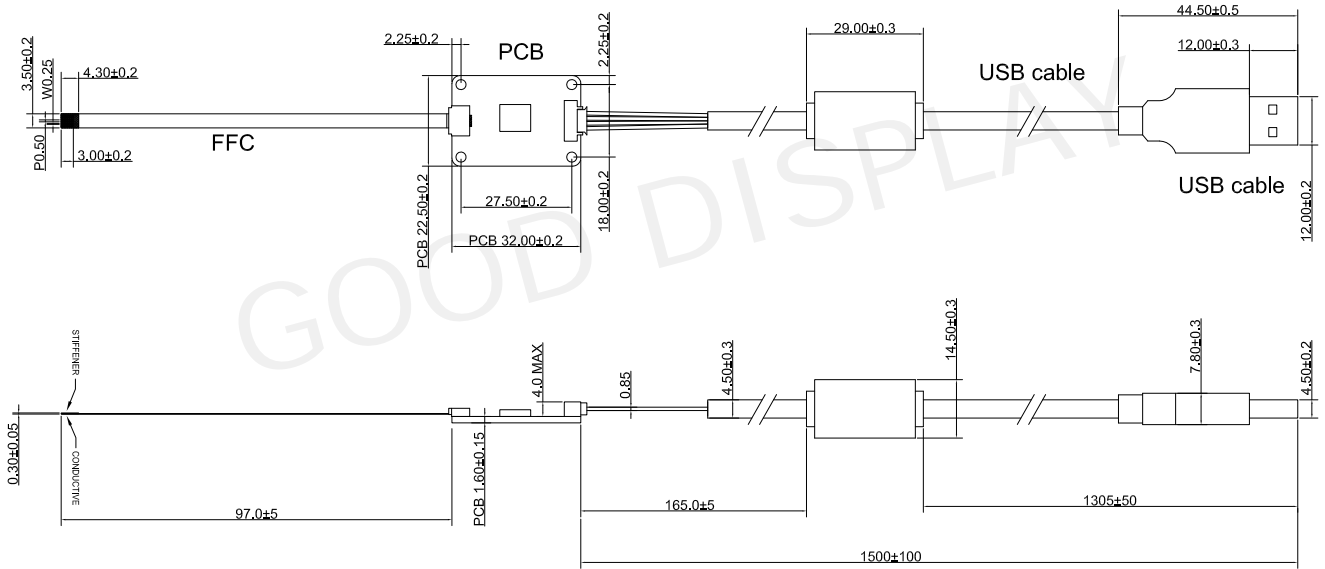

### Capacitive Touch Screen

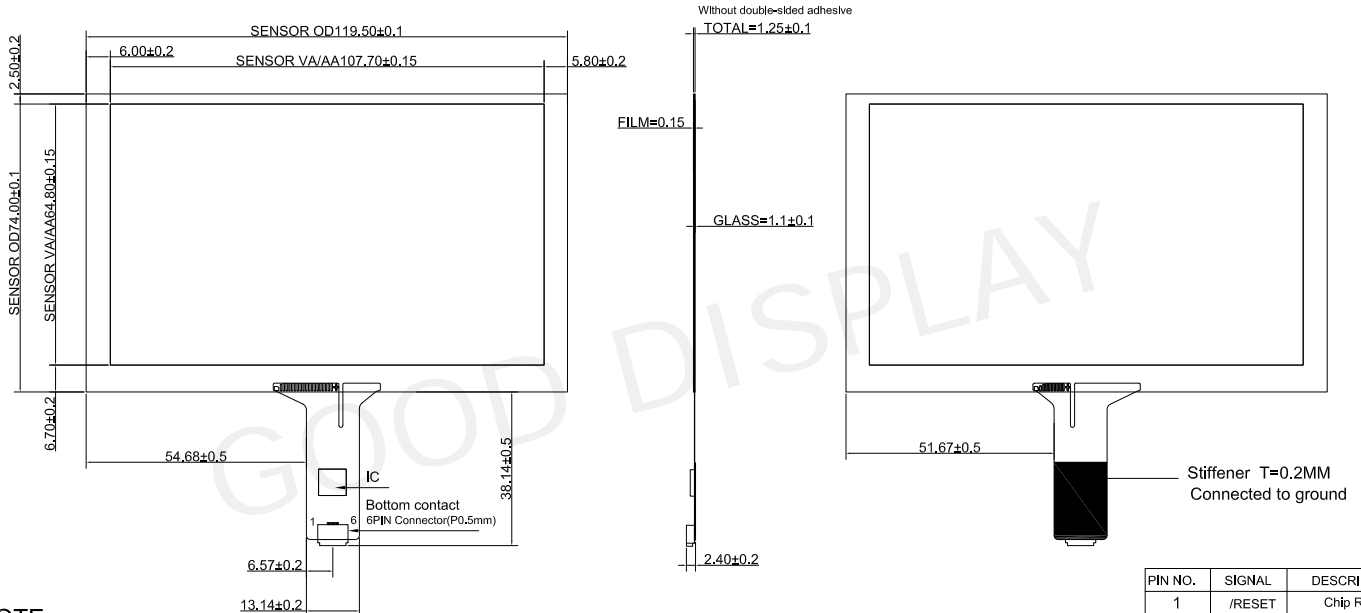

**NOTE:**

- 1.G+FLIM  
ITO GALSS:1.1MM  
Explosion-Proof Membrane:0.15MM
- 2.IC: GT911+USB DRIVE BOARD
- 3.OPERATING VOLTAGE: 2.8-3.3V
- 4.TRANSMITTANCE: >= 80%
- 5.SURFACE HARDNESS: 3H
- 6.OPERATING TEMP: -20 ~ +70°C ≤90%RH
- 7.STORAGE TEMP: -30 ~ +80°C ≤90%RH

PIN NO.	SIGNAL	DESCRIPTION
1	/RESET	Chip Reset
2	VDD	Supply Voltage
3	GND	Ground Connection
4	/INT	Interrupt Signal
5	SDA	I2C Data Line
6	SCL	I2C Clock Line

 <b>DALIAN GOOD DISPLAY CO., LTD.</b> GooDisplay	 <b>CD</b>
	UNIT: MM      SIZE: A4 SHEET: 1 OF 1
<b>LCM PART NUMBER: GDTE050-5-USB</b>	
<b>REV: A0</b>	
<b>DRAWN BY :</b>	<b>CHECKED BY :</b>
<b>APPROVED BY :</b>	