



E-paper Display Catalog

Dalian Good Display Co., Ltd.



1.02''

Features: Flexible / Ultra-thin / Partial refresh / Black and white

Resolution: 128x80

Outline Size: 32.57x18.6x0.3 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 2

Interface: SPI, 30 pin

Time of refresh : 3s

GDEW010213F Time of partial refresh: 0.3s



1.02''

Features: Mini size / Ultra-thin / Partial refresh / Black and white

Resolution: 128x80

Outline Size: 32.57x18.6x0.3 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 2

Interface: SPI, 30 pin

Time of refresh : 3s

GDEW0102T4 Time of partial refresh: 0.3s



1.54''

Features: Partial refresh / 4 Grayscale / Front light(optional) / Touch screen(optional) / Black and white

Resolution: 152x152

Outline Size: 31.8x37.32x0.98 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 4

Interface: SPI, 24 pin

Time of refresh : 3s

GDEW0154T8 Time of partial refresh: 0.3s



1.54''

Features: Partial refresh / Front light(optional) / Touch screen(optional) / Black and white

Resolution: 200x200

Outline Size: 31.8x37.32x1.05 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 4s

GDEH0154D67 Time of partial refresh: 0.26s



GDEW0154I9F

1.54"

Features: Flexible / Ultra-thin / Partial refresh / 4 Grayscale / Black and white

Resolution: 152x152
 Outline Size: 31.8x37.32x0.34 mm
 Operating Temperature: 0°C~+50°C
 Max Grayscale: 4
 Interface: SPI, 24 pin
 Time of refresh : 3s
 Time of partial refresh: 0.3s



GDEM0154E97LT

1.54"

Features: Low temperature / Black and white / Front light(optional) / Touch screen(optional)

Resolution: 152x152
 Outline Size: 31.8x37.32x1.05 mm
 Operating Temperature: -20°C~+55°C
 Max Grayscale: 2
 Interface: SPI, 24 pin
 Time of refresh : 3s
 Time of partial refresh: 0.3s



GDEW0154Z04

1.54"

Features: Black, white and red / Front light(optional) / Touch screen(optional)

Resolution: 200x200
 Outline Size: 31.8x37.32x0.98 mm
 Operating Temperature: 0°C~+40°C
 Max Grayscale: 2
 Interface: SPI, 24 pin
 Time of refresh : 8s



GDEW0154Z17

1.54"

Features: Black, white and red / Front light(optional) / Touch screen(optional)

Resolution: 152x152
 Outline Size: 31.8x37.32x0.98 mm
 Operating Temperature: 0°C~+40°C
 Max Grayscale: 2
 Interface: SPI, 24 pin
 Time of refresh : 16s





1.54''

Features: Black, white and yellow / **Front light(optional) / Touch screen(optional)**

Resolution: 152x152

Outline Size: 31.8x37.32x0.98 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 26s



GDEW0154C39




1.54 inch Front Light

1.54''

Matches GDEW0154T8, GDEH0154D67,
GDEW0154Z04, GDEW0154Z17, GDEW0154C39,
GDEM0154E97LT

Outline Size: 30.4x39.52 mm

Connector: 6 pin FPC

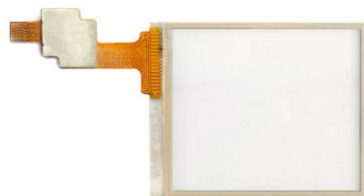

1.54 inch Touch Screen

1.54''

Matches GDEW0154T8, GDEH0154D67,
GDEW0154Z04, GDEW0154Z17, GDEW0154C39,
GDEM0154E97LT

Outline Size: 31x33.5 mm

Connector: 6 pin FPC



GDEW0213T5

2.13''

Features: Partial refresh / 4 Grayscale / **Black and white**

Resolution: 212x104

Outline Size: 59.2x29.2x0.98 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 4

Interface: SPI, 24 pin

Time of refresh : 3s

Time of partial refresh: 0.3s



GDEW021315F

2.13''

Features: Partial refresh / 4 Grayscale / **Black and white/ Flexible**

Resolution: 212x104

Outline Size: 59.2x29.2x0.3 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 4

Interface: SPI, 24 pin

Time of refresh : 3s

Time of partial refresh: 0.3s



GDEH0213B73

2.13''

Features: Partial refresh / Black and white

Resolution: 250x122

Outline Size: 59.2x29.2x1.05 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 4s

Time of partial refresh: 0.3s



GDEW0213V7LT

2.13''

Features: Ultra-low temperature/Partial refresh / Black and white

Resolution: 212x104

Outline Size: 59.2x29.2x0.98 mm

Operating Temperature: -25°C~+10°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 3s

Time of partial refresh: 0.3s



GDEH0213D30LT

2.13''

Features: Ultra-low temperature / Black and white

Resolution: 212x104

Outline Size: 59.2x29.2x1.05 mm

Operating Temperature: -25°C~+25°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 3s

Time of partial refresh: 0.3s



GDEW0213C38

2.13''

Features: Black, white and yellow

Resolution: 212x104

Outline Size: 59.2x29.2x0.98 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 18s



GDEW0213Z16

2.13''

Features: Black, white and red

Resolution: 212x104

Outline Size: 59.2x29.2x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 16s





2.6"

Features: Partial refresh / 4 Grayscale / Black and white

Resolution: 296x152
 Outline Size: 71.82x36.3x1.18 mm
 Operating Temperature: 0°C~+50°C
 Max Grayscale: 4
 Interface: SPI, 24 pin
 Time of refresh : 3s

GDEW026T0

Time of partial refresh: 0.3s



2.6"

Features: Black, white and red

Resolution: 296x152
 Outline Size: 71.82x36.3x1.18 mm
 Operating Temperature: 0°C~+40°C
 Max Grayscale: 2
 Interface: SPI, 24 pin
 Time of refresh : 16s

GDEW026Z39



2.7"

Features: Partial refresh / 4 Grayscale / Black and white / Touch screen(optional)

Resolution: 264x176
 Outline Size: 70.42x45.8x0.98 mm
 Operating Temperature: 0°C~+50°C
 Max Grayscale: 4
 Interface: SPI, 24 pin
 Time of refresh : 3s

GDEW027W3

Time of partial refresh: 0.3s



2.7"

Features: Black, white and red / Touch screen(optional)

Resolution: 264x176
 Outline Size: 70.42x45.8x0.98 mm
 Operating Temperature: 0°C~+40°C
 Max Grayscale: 2
 Interface: SPI, 24 pin
 Time of refresh : 16s

GDEW027C44



2.7"

Matches GDEW027W3, GDEW027C44

Outline Size: 65.5x44.5 mm
 Connector: 6 pin FPC

2.7 inch Touch Screen



2.9"

Features: Black, white / Partial refresh

Resolution: 296x128

Outline Size: 79x36.7x1.18 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 3s

GDEH029A1 Time of partial refresh:0.3S



2.9"

Features: Partial refresh / 4 Grayscale / Black, white

Resolution: 296x128

Outline Size: 79x36.7x1.18 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 4

Interface: SPI, 24 pin

Time of refresh : 3s

GDEW029T5 Time of partial refresh: 0.3s



2.9"

Features: Black, white / Partial refresh / Ultra-low temperature

Resolution: 296x128

Outline Size: 79x36.7x1.25 mm

Operating Temperature: -25°C~+25°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 3s

GDEH029D56LT Time of partial refresh:0.3S



2.9"

Features: Partial refresh / 4 Grayscale / Black, white/ Flexible

Resolution: 296x128

Outline Size: 79x36.7x0.34 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 4

Interface: SPI, 24 pin

Time of refresh : 3s

GDEW02916F Time of partial refresh: 0.3s



GDEW029Z10

2.9"

Features: Black, white and red

Resolution: 296x128

Outline Size: 79x36.7x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 16s



GDEW029C32

2.9"

Features: Black, white and yellow

Resolution: 296x128

Outline Size: 79x36.7x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 18s



GDEW0371W7

3.71"

Features: Black, white/ 4 Grayscale

Resolution: 416x240

Outline Size: 92.99x53x1.18 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 4

Interface: SPI, 24 pin

Time of refresh : 4s



GDEW0371Z80

3.71"

Features: Black, white and red

Resolution: 416x240

Outline Size: 92.99x53x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin



GDEW042T2

4.2"

Features: Black, white/ 4 Grayscale

Resolution: 400x300

Outline Size: 91x77x1.18 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 4

Interface: SPI, 24 pin

Time of refresh : 3s

Time of partial refresh: 0.3s



GDEW042Z15

4.2"

Features: Black, white and red

Resolution: 400x300

Outline Size: 91x77x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 15s



GDEW042C37

4.2"

Features: Black, white and yellow

Resolution: 400x300

Outline Size: 91x77x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 28s



GDE043A2

4.3"

Features: Parallel interface / Black, white / 16 Grayscale / Partial refresh

Resolution: 800x600

Outline Size: 126.5 x74.6 x1.17 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 16

Interface: Parallel, 26 pin

Time of refresh : 1s

Time of partial refresh: 1s



GDE043A2-T

4.3"

Features: Parallel interface / With touch screen / Black, white / 16 Grayscale / Partial refresh

Resolution: 800x600

Outline Size: 126.5 x74.6 x1.65 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 16

Interface: Parallel, 26 pin

Time of refresh : 1s

Time of partial refresh: 1s



4.3"

Features: Parallel interface / With front light / Black, white / 16 Grayscale / Partial refresh

Resolution: 800x600
 Outline Size: 126.5x74.6x1.97 mm
 Operating Temperature: 0°C~+50°C
 Max Grayscale: 16
 Interface: Parallel, 26 pin
 Time of refresh : 1s

GDE043A2-FL



5.83"

Features: Black, white

Resolution: 600x448
 Outline Size: 125.4x99.5x1.18 mm
 Operating Temperature: 0°C~+50°C
 Max Grayscale: 2
 Interface: SPI, 24 pin
 Time of refresh : 3s

GDEW0583T7



5.83"

Features: Black, white and red

Resolution: 600x448
 Outline Size: 125.4x99.5x1.18 mm
 Operating Temperature: 0°C~+40°C
 Max Grayscale: 2
 Interface: SPI, 24 pin
 Time of refresh : 15s



GDEW0583Z21



5.83"

Features: Black, white and yellow

Resolution: 600x448
 Outline Size: 125.4x99.5x1.18 mm
 Operating Temperature: 0°C~+40°C
 Max Grayscale: 2
 Interface: SPI, 24 pin
 Time of refresh : 25s



GDEW0583C64



5.83"

Features: Black, white and red / High resolution

Resolution: 648x480

Outline Size: 125.4x99.5x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 12s

GDEW0583Z83



6"

Features: Parallel interface / Black, white / 16 Grayscale / Partial refresh

Resolution:800x600

Outline Size: 101.8x138.4x1.18 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 16

Interface: Parallel, 34 pin

Time of refresh : 1s

Time of partial refresh:1s

GDE060BA



6"

Features: Parallel interface / Black, white / High resolution / 16 Grayscale / Partial refresh

Resolution: 1024x758

Outline Size: 101.8x138.4x1.18 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 16

Interface: Parallel, 34 pin

Time of refresh : 1s

Time of partial refresh:1s

GDE060F3



6"

Features: Parallel interface / Black, white / With front light / 16 Grayscale / Partial refresh

Resolution: 800x600

Outline Size:101.8x138.4x2.1 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 16

Interface: Parallel, 34 pin

Time of refresh : 1s

Time of partial refresh:1s

GDE060BAFL



GDE060BAFL-T

6"

Features: Parallel interface / Black, white / With front light / With touch screen / 16 Grayscale / Partial refresh

Resolution: 800x600
 Outline Size:101.8x138.4x2.4 mm
 Operating Temperature: 0°C~+50°C
 Max Grayscale: 16
 Interface: Parallel, 34 pin
 Time of refresh : 1s
 Time of partial refresh:1s



GDE060BA-T

6"

Features: Parallel interface / Black, white / With touch screen / 16 Grayscale / Partial refresh

Resolution: 800x600
 Outline Size:101.8x138.4x1.7 mm
 Operating Temperature: 0°C~+50°C
 Max Grayscale: 16
 Interface: Parallel, 34 pin
 Time of refresh : 1s
 Time of partial refresh:1s



GDEW075T7

7.5"

Features: Black, white / High resolution / 4 Grayscale

Resolution: 800x480
 Outline Size: 170.2x111.2x1.18 mm
 Operating Temperature: 0°C~+50°C
 Max Grayscale: 4
 Interface: SPI, 24 pin
 Time of refresh:4s



GDEW075Z08

7.5"

Features: Black, white and red / High resolution

Resolution: 800x480
 Outline Size: 170.2x111.2x1.18 mm
 Operating Temperature: 0°C~+40°C
 Max Grayscale: 2
 Interface: SPI, 24 pin
 Time of refresh : 15s





GDEW075C64



7.5"

Features: Black, white and yellow / High resolution

Resolution: 800x480

Outline Size: 170.2x111.2x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin



GDEW075C21



7.5"

Features: Black, white and yellow

Resolution: 640x384

Outline Size: 170.2x111.2x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 24 pin

Time of refresh : 18s



GDEW080T5



8"

Features: Parallel interface / Black, white / 16 Grayscale

Resolution: 1024x768

Outline Size: 134.11x178.56x1.18 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 16

Interface: Parallel, 34 pin

Time of refresh:1s

Time of partial refresh:1s



GDEP097C2

9.7"

Features: Parallel interface / Black, white / 16 Grayscale

Resolution: 1200x825

Outline Size: 218.8x156.425x1.15 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 16

Interface: Parallel, 33 pin

Time of refresh : 1s



GDEW1248T3

12.48"

Features: Big size / Black, white / 4 Grayscale

Resolution: 1304x984

Outline Size: 261.5x211x1.18 mm

Operating Temperature: 0°C~+50°C

Max Grayscale: 4

Interface: SPI, 30 pin

Time of refresh : 6s



GDEW1248Z95

12.48"

Features: Big size / Black, white and red

Resolution:1304x984

Outline Size: 261.5x211x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 30 pin

Time of refresh : 20s



GDEW1248C63

12.48"

Features: Big size / Black, white and yellow

Resolution: 1304x984

Outline Size: 261.5x211x1.18 mm

Operating Temperature: 0°C~+40°C

Max Grayscale: 2

Interface: SPI, 30 pin

Time of refresh : 30s

